



# DELTA



MADE IN USA

## MINI SIGNAL LIGHT KIT With HARNESS and Amber Bulbs

P/N 05-2000-32


### INSTALLATION INSTRUCTION

1. Remove Headlights from the headlamp buckets
2. Remove miniature "City Light" from each headlight by pulling out the bulb socket.
3. Remove each "City Light" bulb from the bulb socket by ½ counter-clockwise turn.
4. Install amber "Blinker Light Bulbs" in the bulb sockets by ½ clockwise turn into the socket.
5. Install bulb sockets into the headlight by pushing them into the headlight reflector.
6. Connect each pair of female connectors on the wire harness to the "Blinker Bulb Sockets".
7. Install headlights inside the headlamp buckets.
8. Splice each blank yellow wire into the factory "hot" directional light wire on each side of the vehicle using Splice Connectors (provided)

**NOTE:** When splicing the wire first feed the factory wire through the Splice Connector. Then feed the yellow Harness wire lead into the blocked channel of the Splice Connector. Squeeze the "knife blade" inside the connector with pliers so that it will cut through both wires and make a permanent contact (splice). See photo

9. Connect the black (ground wires) to any metal surface under the hood using sheet metal screws (provided).

You may now test your lights. Each time you turn the light signal it will activate your Mini-Signal Light inside your headlight.

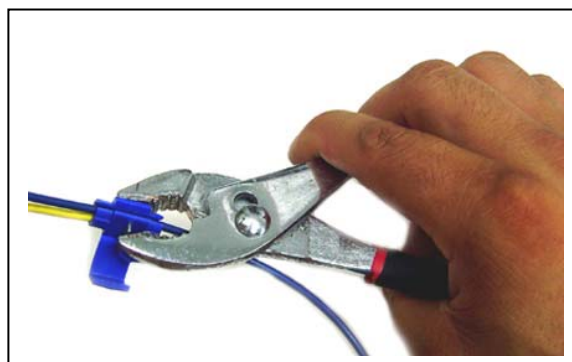

DELTA TECH INDUSTRIES, LLC - Placentia, CA 92870, U.S.A.

Web: [www.deltalights.com](http://www.deltalights.com) E-mail: [sales@deltatechindustries.com](mailto:sales@deltatechindustries.com)